


# ARM CAP

Illustration 1

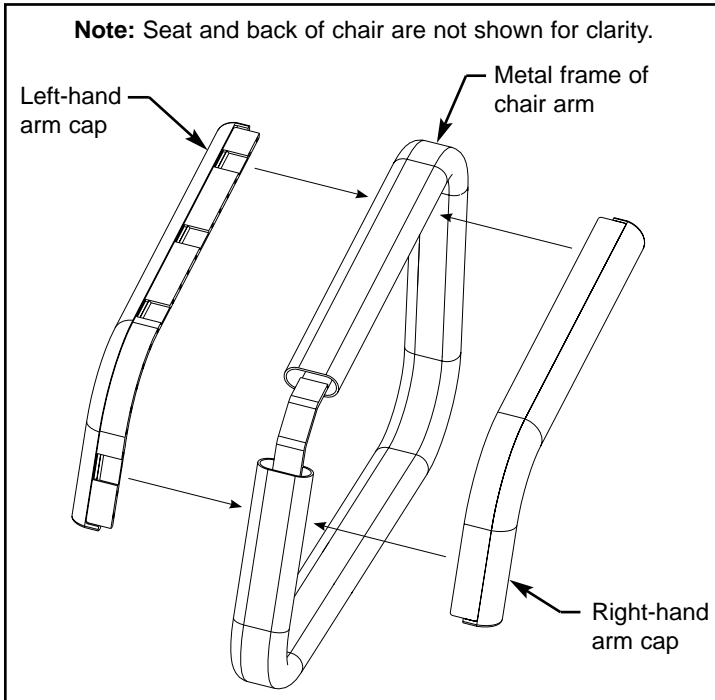

Read all instructions and review illustrations before installing.

Tools required for assembly:  
None

This assembly includes:  
(2) Right-hand arm cap  
(2) Left-hand arm cap

**Replacement (refer to Illustration 1):**

1. If necessary, remove old or damaged arm parts from frame of chair, exposing the metal frame of chair arm.
2. Position left-hand arm cap over metal frame of chair as shown.
3. Position right-hand arm cap over metal frame of chair. Align top and bottom edges of arm caps.

### IMPORTANT

Once snapped together, arm caps cannot be removed without damage. Ensure parts are properly positioned and aligned before snapping arm caps together.

4. Firmly press arm caps together.

REPLACEMENT INSTRUCTIONS